


SPT-2 18/2 Cordsets

8 feet long with molded plug

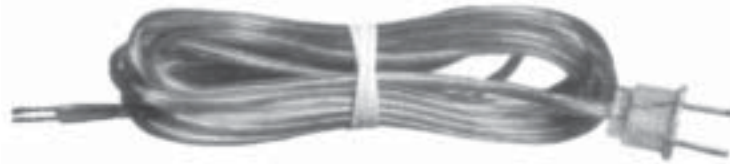

- 27142 -silver
- 24512 -white
- 27199 -brown
- 27250 -black
- 24545 -clear gold

250 foot spools



Ground wire 18 ga. 10" long with 6/32 slip lug 25050



Ground wire 18 ga. 10" long with 8/32 slip lug 23881

18ga. bare copper wire 250 ft. spool



29110

18/2, SPT-2

- 24368 -clear gold
- 24138 -black
- 23636 -white
- 23811 -brown
- 23965 -clear silver

18/2, SPT-1

- 23485 -clear silver
- 23644 -brown
- 23710 -white
- 23570 -black
- 23657 -clear gold

High Heat Porcelain Connectors



- 29278 2-6 #18
- 29285 2-5 #18
- 29325 2-4 #18

1/8 IP Plastic Pipe Bushing



24511 clear



Pack 100 per box

Spring Loaded Wire Connectors

Part Number	Color	Wire gauge	Voltage	Temp. (C/F)
14560	Grey	22-16	300V	105/221
14533	Blue	22-14	300V	105/221
14593	Orange	22-14	600V	105/221
14808	Yellow	22-14	600V	105/221
14946	Red	18-10	600V	105/221
14720	Black high heat	22-14	300V	150/302
14738	Black high heat	22-16	300V	150/302
14673	Yellow wing	18-10	600V	105/221
14699	Red wing	18-8	600V	105/221

www.citylightsphx.com

3911 W Van Buren #3
Phoenix, AZ. 85009

Local
Phone: 602 233 2552
Fax: 602 233 1102



Call Toll Free
Phone: 877 615 4448
Fax: 877 432 8527

2 Push & Lever Wire Nuts

Connect Stranded and Solid Wire

Fast - Safe - Easy

600 V building wiring
1000 V fixtures and signs
Current rating: Largest conductor used
105° C rated (221° F)



Clear housing allows visual confirmation of connection
Test port for easy continuity testing



File: LR46759



Yellow 2-conductor, 100 pc/box

- 12-16 AWG Stranded Copper (stranding pattern less than or equal to 19)
- 12-18 AWG Solid Copper

29210



Ground 2-conductor, 100 pc/box:

- 12-18 AWG Stranded Copper (stranding pattern less than or equal to 19)
- 12-18 AWG Solid Copper

29200



Orange 4-conductor, 100 pc/box:

- 12-16 AWG Stranded Copper (stranding pattern less than or equal to 19)
- 12-18 AWG Solid Copper

29125



Ground 4-conductor, 100 pc/box:

- 12-16 AWG Stranded Copper (stranding pattern less than or equal to 19)
- 12-18 AWG Solid Copper

29105



Lt. Grey Special 4-cond. 100pc/box

- 12-16 AWG Stranded Copper (stranding pattern less than or equal to 19)
- 12-18 AWG Solid Copper
- 18 AWG Stranded Copper (Stranding pattern less than or equal to 16)
- 18 AWG Solid Copper

29280

(Special opening)

29220



Box 50

3 Hole for 10 AWG wire



Black 8-conductor, 50pc/box:

- 12-16 AWG Stranded Copper (stranding pattern less than or equal to 19)
- 12-18 AWG Solid Copper

29290



Ground 8-conductor, 50 pc/box:

- 12-16 AWG Stranded Copper (stranding pattern less than or equal to 19)
- 12-18 AWG Solid Copper

29205



Dark Grey 8-conductor, 50pc/box:

- 12-16 AWG Stranded Copper (stranding pattern less than or equal to 19)
- 12-18 AWG Solid Copper

29150



Ground 8-conductor, 50 pc/box:

- 12-16 AWG Stranded Copper (stranding pattern less than or equal to 19)
- 12-18 AWG Solid Copper

29305

3 or 5 Conductor Compact Connector

Cross section: 28 - 12 AWG (stranded and solid)
Electrical specs: 600 V maximum
20 A maximum
Strip length: 9 - 10 mm / 0.37 in
Maximum operating temperature: 105° C

Box 50



29235

Box 40



29275

Call Toll Free

Phone: 877 615 4448

Fax: 877 432 8527



www.citylightsphx.com

Local

Phone: 602 233 2552

Fax: 602 233 1102

3911 W Van Buren #3

Phoenix, AZ. 85009

UL Listed

SVT & SJT Wire

250 foot spools

300 Volts 105 degree C

SVT 18/2
24143 -black
24440 -white

SVT 18/3
23777 -black
24137 -white



SJT 18/2
23484 -black
23870 -white

SJT 18/3
23799 -black
23708 -white



WAGO LUMI-NUTS - PUSH

Conductor
Types



Locking Latch



Identification (black for L & white for N) for circuit wiring

Connector for Luminaire Disconnect



23819

Daisy Chain

Keyed Connector
Quality Materials
Compact Design

Professional Contractor Grade Single Tap Extension Cords

Cord Gauge: 14/3
Cord Jacket: SJTW
Cord Rating: 25 & 50 foot - 15 Amps
100 foot -13 Amps



23463 -25'
23574 -50'
23721 -100'

www.citylightsphx.com

3911 W Van Buren #3
Phoenix, AZ. 85009

Local
Phone: 602 233 2552
Fax: 602 233 1102



Call Toll Free
Phone: 877 615 4448
Fax: 877 432 8527